



EISK16-100T Skorpion Switch

Cost Effective, 100 Mbps-speed — Compact Size

The EISK16-100T Skorpion Switch is a sixteen-port unmanaged Ethernet switch that provides 100 Mbps performance on all ports to accommodate a range of control devices and workstations commonly found in an automation project. For 10 Mbps legacy devices, the switch will automatically reduce its port-speed accordingly. This low-cost compact unit utilizes a rugged metal enclosure and is intended for installation in control panels using DIN-rail mounting.


The switch supports plug-and-play operation and requires no configuration. All ports automatically configure

their data rate and duplex using the Auto-negotiation protocol. Depending on the capability of the link partner, communication is set at 10 or 100 Mbps and at either half- or full-duplex. Each port accommodates either a straight-through or crossover cable using the Auto-MDIX protocol.

The unit is powered from a choice of low-voltages (AC or DC). Redundant power connections are provided for back-up power schemes. LEDs assist in troubleshooting.

EISK16-100T Ethernet Switch Features...

- Plug-and-Play operation
- 10BASE-T/100BASE-TX
- Shielded RJ-45 connectors
- Auto-negotiation of speed and duplex
- Auto-MDIX supports cable inversion
- DIN-rail mounting
- Rugged metal enclosure
- Diagnostic LEDs
- Enhanced EMC compliance
- UL 508 listed, c-UL listed, CE mark
- 24 VAC/VDC powered

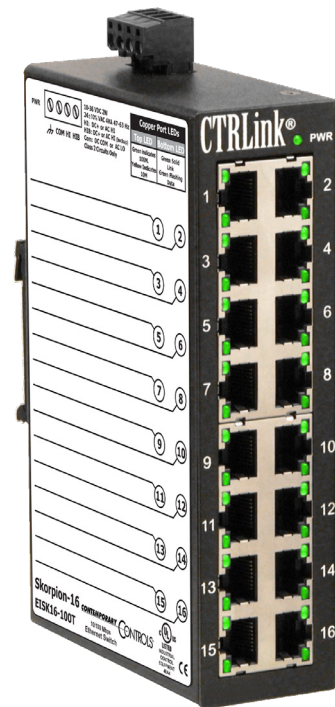

Overview


The Skorpion Switch is intended for control panel installations where DIN-rail space is at a premium by requiring a width of only 41 mm of rail space. A metal DIN-rail clip attached to the aluminium enclosure can survive the toughest installation. A writable side label allows the installer an opportunity to document field cabling locations right on the unit.

The switch can be powered from either a 10–36 VDC or 24 VAC ($\pm 10\%$) source. Its half-wave rectified low-voltage power supply allows the sharing of power with other 24 VAC/VDC control devices

from a common power supply. With redundant power connections, a backup power scheme can be supported. A removable power connector facilitates the servicing of the unit.

LEDs built into the connector indicate data rate and activity on each of the sixteen ports — greatly assisting in troubleshooting connection issues.

The switch is UL 508 Listed and c-UL Listed for Industrial Control Equipment. It complies with CFR 47 Part 15 Class A, and carries the CE Mark. It is RoHS compliant.

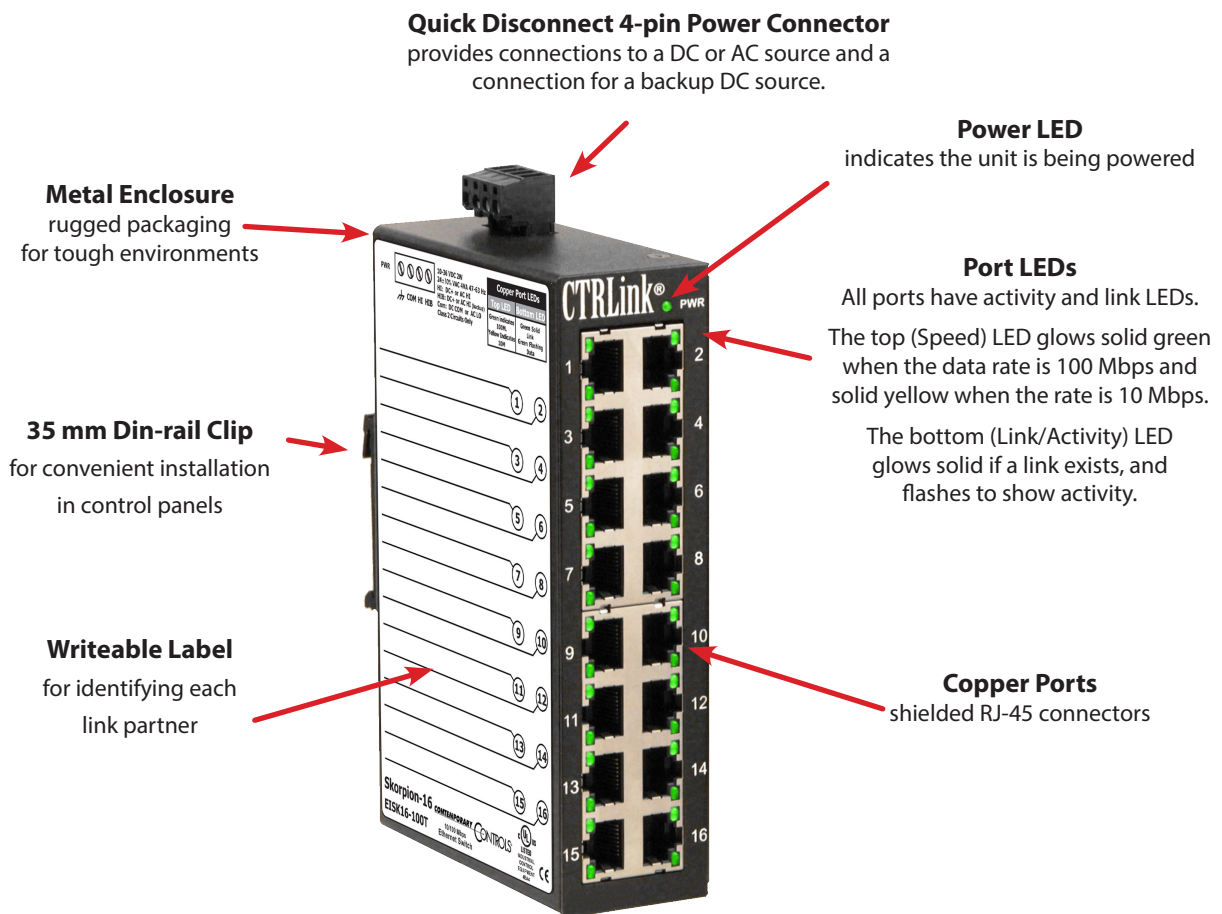

Specifications

Power Requirements

10–36 VDC 2 W or 24 VAC $\pm 10\%$ 4 VA 47–63 Hz

Operating Temperature

0°C to 60°C

Storage Temperature

–40°C to 85°C

Relative Humidity

10–95%, non-condensing

Protection

IP30

Mounting

TS-35 DIN-rail

Shipping Weight

1 lb (0.45 kg)

Ethernet Communications

IEEE 802.3 10/100 Mbps data rate
using RJ-45 connectors, 100 m (max)

LEDs

Power Green = power on
Speed Green = 100 Mbps link
Yellow = 10 Mbps link
Link/Activity Green = Link established
Flashing = Data transmission


Regulatory Compliance

CE Mark; CFR 47, Part 15 Class A; RoHS;
UL 508 Industrial Control Equipment;
EN55032; EN55035




RJ-45 Connector Pin Assignments

Pin	Function
1	TD+
2	TD–
3	RD+
4	Not Used
5	Not Used
6	RD–
7	Not Used
8	Not Used




Mechanical Drawing

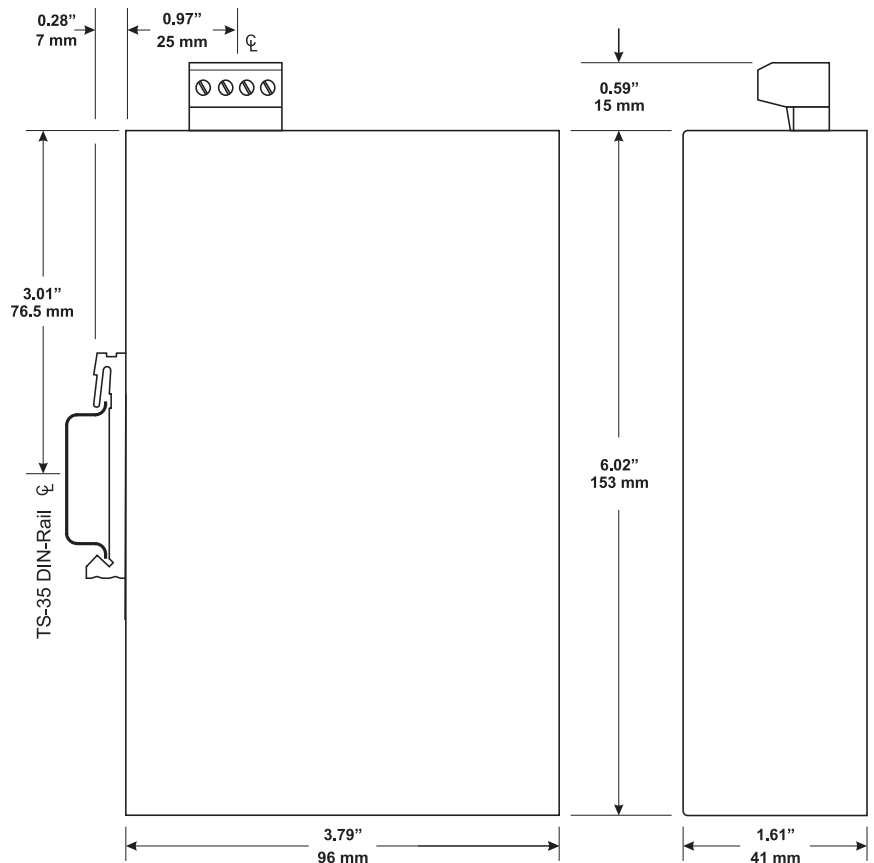


Power Considerations

Applied voltage must be in the specified range and deliver a current commensurate with power consumption. The recommended size for solid power conductors is 16–20 AWG; and for stranded conductors use 16–18 AWG. Zero volts (COM) is isolated from chassis (earth). Input connections are reverse-polarity protected.


Input power: 10–36 VDC or 24 VAC ± 10%, 47–60 Hz.
Connecting chassis to earth or using a backup source is always optional.
All options shown are for use in Class 2 circuits.




DC Powered



AC Powered




AC Powered with
Grounded Secondary

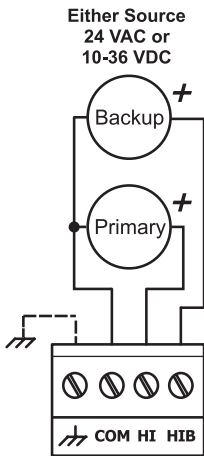


Redundant
Power

Typical Switch Installations

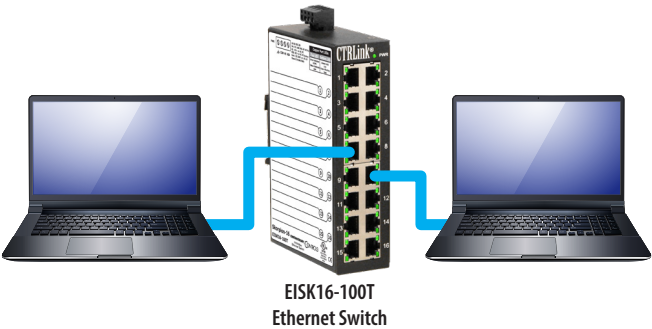

EISK16-100T
Ethernet Switch

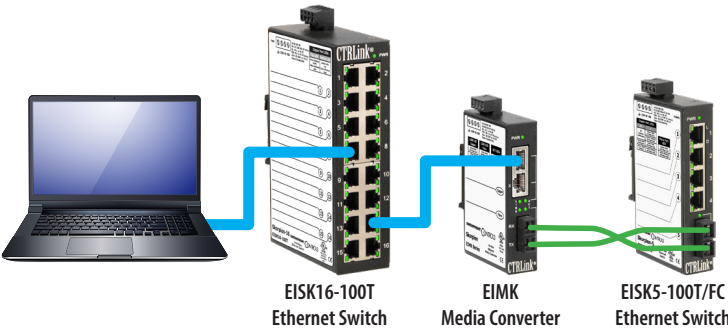

EISK16-100T
Ethernet Switch

EIMK
Media Converter

EISK5-100T/FC
Ethernet Switch

Ordering Information

Model	Description
EISK16-100T	Skorpion 16-Port 10/100 Mbps Switch

United States Contemporary Control Systems, Inc. Tel: +1 630 963 7070 Fax: +1 630 963 0109 info@ccontrols.com	China Contemporary Controls (Suzhou) Co. Ltd Tel: +86 512 68095866 Fax: +86 512 68093760 info@ccontrols.com.cn	United Kingdom Contemporary Controls Ltd Tel: +44 (0)24 7641 3786 Fax: +44 (0)24 7641 3923 ccl.info@ccontrols.com	Germany Contemporary Controls GmbH Tel: +49 341 520359 0 Fax: +49 341 520359 16 c cg.info@ccontrols.com
www.ccontrols.com			